

**POWER SUPPLY DESIGN LEADER**

N2Power continues to lead the power density race with its new small, high efficiency XR125 Series AC-DC power supplies. Our state of the art technology yields a very small footprint, reduces wasted power, and offers the highest power density in the market in the 125 watt range. This unique design means reduced energy costs, a greater return on your investment, higher reliability and longer product life.

**HIGHLIGHTS**

- 125W AC-DC
- Up to 91% Efficiency
- High Power Density: 6.7 W / cu in.
- Universal AC input
- Active PFC (90-264 VAC)
- Built in OR-ing Diode/MOSFET for N+1 (Optional)
- Single Wire Current Sharing (Most Models)
- 3" X 5" Small Footprint
- <1U High: 1.32"
- No Load Operation
- RoHS Compliant

**PFC READY, SAVE ENERGY**

All XR125 products incorporate active PFC technology with universal input to provide superior efficiency in each supply. Comparisons of power loading show that our supplies can reduce consumption up to 50%.


**UNMATCHED POWER DENSITY**

With an overall height of 1.32" and a 3" x 5" footprint, the XR125 Series boasts a power density of 6.7 watts per cubic inch. It is ideally suited for OEMs using industry standard 1U chassis.



**Typical Mechanical Drawing:**

Inches (millimeters), connectors and pinouts may vary with model. Refer to XR125 Product Specification for complete information.

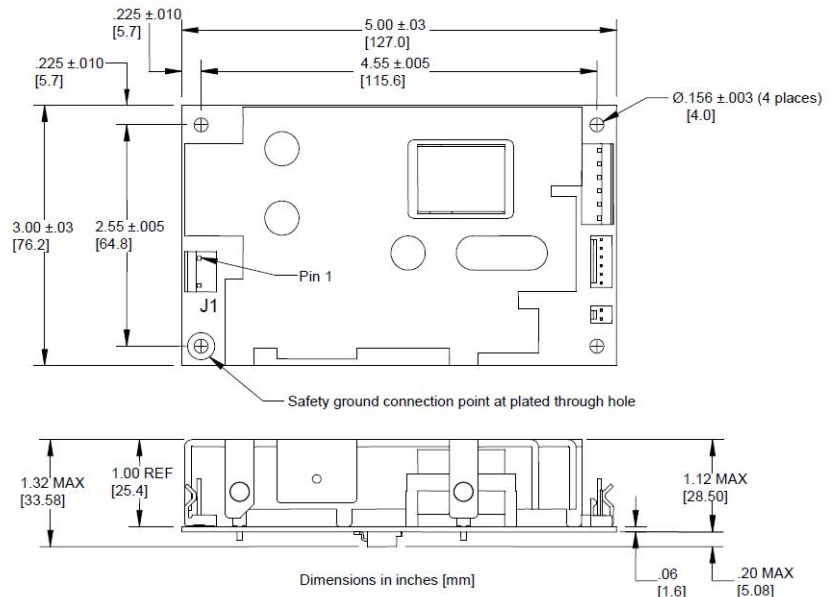

Note: Recommended standoff size is .375" high and all mounting hardware should be less than .28" in diameter. A standoff less than .375" high is acceptable when a thin insulator, 0.4mm thick (polyester, fish paper or equivalent UL rated 94V-2 minimum) is placed between the XR125 and the mounting chassis (refer to applicable UL standard for clearance requirements).

**HIGH EFFICIENCY IN A SMALL PACKAGE**

The XR125 Series provides up to 91% efficiency in an AC-DC power supply. Our unique design reduces energy consumption and generates less wasted heat. It requires little forced air cooling, decreases AC loads, increases reliability and economy of operation.

Contact us regarding custom and modified standard supplies for unique applications.



MODEL	PART NUMBER	OUTPUT	VOLTAGE	REGULATION (%)	MAXIMUM CURRENT (A)	RIPPLE & NOISE (P-P)
XR125-1	400150-01-7	V1	3.3	±3	10.0	50 mV
		V2	5	±4	15.0	50 mV
		V3	12	±5	6.0	120mV
		V4	-12	±5	1.0	120mV
XR125-7	400151-01-5	V1	2.5	±3	12.0	50 mV
		V2	5	±4	16.5	50 mV
		V3	12	±5	6.0	120mV
		V4	-12	±5	1.0	120mV
XR125-8	400152-01-3	V2	5	±5	20.0	50 mV
		V3	12	±5	6.0	120mV
		V4	-12	±5	1.0	120mV
XR125-03	400168-01-9	V1	3.3	±3	32.0	30 mV
XR125-03 CS	400168-02-7	V2	12	±5	1.0	120 mV
XR125-05	400165-01-5	V1	5	±3	25.0	50 mV
XR125-05 CS	400165-02-3	V2	12	±5	1.0	120 mV
XR125-07 CS	400166-01-3	V1	7	±3	17.9	70 mV
		V2	12	±5	1.0	120 mV
XR125-08 CS	400167-01-1	V1	8	±3	15.6	80 mV
		V2	12	±5	1.0	120 mV
XR125-12	400155-01-6	V1	12	±3	10.5	120 mV
XR125-12 CS	400155-02-4	V2	12	±5	1.0	120 mV
XR125-15	400156-01-4	V1	15	±3	8.3	150 mV
XR125-15 CS	400156-02-2	V2	12	±5	1.0	120 mV
XR125-19 CS	400157-01-2	V1	19	±3	6.6	190 mV
		V2	12	±5	1.0	120 mV
XR125-24	400158-01-0	V1	24	±3	5.2	240 mV
XR125-24 CS	400158-02-8	V2	12	±5	1.0	120 mV
XR125-28	400159-01-8	V1	28	±3	4.5	280 mV
XR125-28 CS	400159-02-6	V2	12	±5	1.0	120 mV
XR125-30	400160-01-6	V1	30	±3	4.2	300 mV
XR125-30 CS	400160-02-4	V2	12	±5	1.0	120 mV
XR125-48	400161-01-4	V1	48	±3	2.6	480 mV
XR125-48 CS	400161-02-2	V2	12	±5	1.0	120 mV
XR125-51 CS	400162-01-2	V1	51	±3	2.5	510 mV
		V2	12	±5	1.0	120 mV
XR125-54	400163-01-0	V1	54	±3	2.3	540 mV
XR125-54 CS	400163-02-8	V2	12	±5	1.0	120 mV
XR125-56	400164-01-8	V1	56	±3	2.2	560 mV
XR125-56 CS	400164-02-6	V2	12	±5	1.0	120 mV

CS = Current Sharing, implemented by an OR-ing diode/MOSFET on V1 output.

**Compliance** (See Product Spec for additional information):

**USA / Canada**

**Safety:** Underwriters Laboratories: UL 60950-1:2007 (2nd Edition) / C22.2 No. 60950-1-07 Safety of Information Technology Equipment (ITE)

**EMC:** FCC part 15, subpart B

**Europe**

2006/95/EC - "Low Voltage (Safety) Directive"  
Demko: EN 60950-1:2006 (2nd Edition) +A1:2010 +A11:2009 +A12:2011 +A2:2013

2004/108/EC "Electromagnetic Compatibility (EMC) Directive" EN 61204-3 Class B

**International**

IEC 60950-1:2005 (2nd Edition)+ Am1:2009 + Am2:2013  
Safety of Information Technology Equipment

IEC 61204-3 Class B

**For complete specifications on all models, please visit our website at: [www.n2power.com](http://www.n2power.com)**

All information and specifications are based on our knowledge of the products at the time of printing. N2Power reserves the right to change specifications without notice.

Qualstar and the Qualstar logo are registered trademarks of Qualstar Corporation. N2Power and the N2Power logo are trademarks of Qualstar Corporation. All other trademarks are the property of their respective owners.

INPUT SPECIFICATIONS	
Nominal Input Voltage:	100 – 240 VAC
Maximum AC Input:	90 – 264 VAC
Input Frequency Range:	47 – 63 Hz
Input Current:	1.8 A @ 100 VAC
Input Protection:	3.15 A fuse
Safety Isolation:	3000 VAC input to output 1500 VAC input to ground
Inrush Current:	33 A @ 115 VAC
Leakage Current:	< 1.0 mA
Power Factor Correction:	Active PFC circuitry, meets or exceeds EN61000-3-2
OUTPUT SPECIFICATIONS	
Total Power:	125W
Hold-up Time:	Minimum 28 mS at all input voltages
Efficiency:	Up to 91% †
Minimum Load:	No load †
Over / Under Shoot:	Maximum 10% at turn-on
PROTECTION	
Overvoltage Protection:	On all main outputs
Overpower Protection:	Protected / Auto-recovery
Short Circuit Protection:	All outputs protected against short circuit
Thermal Shutdown:	Protected against over temperature conditions
OPERATING SPECIFICATIONS	
Operating Temperature:	-25°C to +50°C
Temperature Derating:	2.5% / degree C to 70°C
Storage Temperature:	-40°C to +85°C
Forced Air Cooling:	10 CFM † Δ
Convection Cooling:	See Product Specification
MTBF:	> 600,000 hours @ 25°C *
SIGNALS	
Remote Sense:	On main output † Δ
Current Sharing (Optional):	Active current sharing with OR-ing diode or MOSFETs † Δ
Power Good:	Provided
PS_OK:	Output †
LED (PG):	All models †

† See Product Specification      Δ Some Models

\* See MTBF Report for additional temperature values

